


PRODUCT FEATURES

- **DC Permanent Magnet Motors**
- **12 Volt and 24 Volt**
- **High Temperature Wheels**
- **-57°C to 150°C (-70°F to 300°F) Storage Temperature**
- **-50°C to 100°C (-58°F to 212°F) Operating Temperature**
- **Mechanical Shock of 50g**
- **Random vibration of 5.9gms with -46°C to 80°C thermal cycling**
- **1,000 hrs. Salt Spray per MIL-STD-202 Method 101**
- **Electromagnetic Interference (EMI) to MIL-STD-461**
- **5,000 to 10,000 hrs.+, continuous duty at 26.5 volts**
- **Waterproof to TACOM #12480562 for Class 2 Components**
- **Different Performance Options Available using 2 or 4 Pole Motors**

Example of Airflow Performance

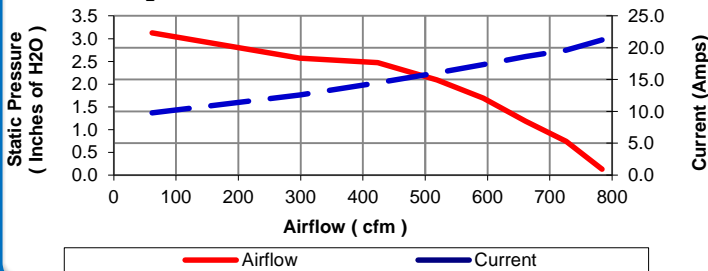

MILITARY DUAL BLOWER ASSEMBLY

